

A night cityscape with a crescent moon and dark clouds. The sky is a mix of orange and dark blue, with a thin crescent moon in the upper left. Large, dark, silhouetted clouds are scattered across the sky. The city lights below are a dense field of small, bright yellow and white dots.

SOLUNA™

POWER DESIGNED FOR NIGHT AND DAY



## ENVIRONMENT

Power designed for clean and affordable energy. Becoming eco-friendly can start at home.



## SECURITY

The safety and security of your home is one more thing you don't have to worry about.



## INDEPENDENCE

Gain freedom from the standards of electricity, powering your home with solar energy.




# ENVIRONMENT

POWER DESIGNED FOR CLEAN AFFORDABLE ENERGY


## SYNC WITH THE SUN

Most energy is used morning and evenings. Soluna Power Banks minimize waste and pollution by leveraging the power of the sun 24 hours a day.

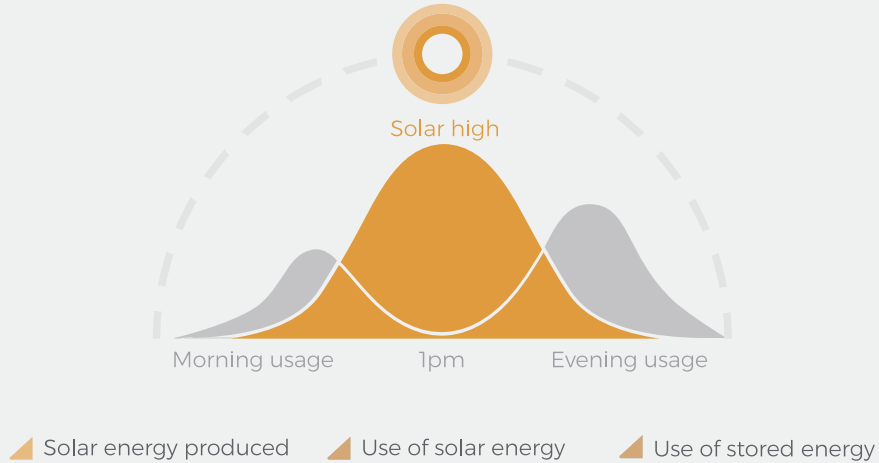

## CLEAN AND AFFORDABLE ENERGY

Once your Soluna Power Bank is full, surplus power is sent to the local grid, saving costs and the environment.

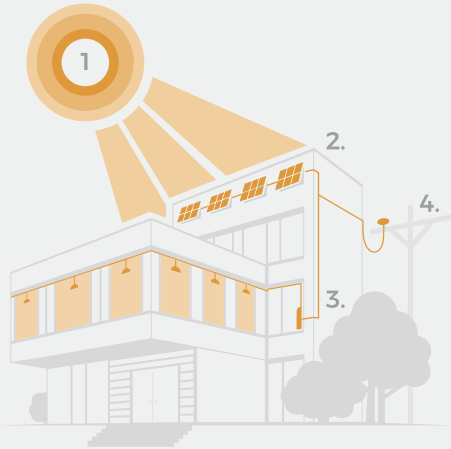

1. Solar energy   2. Solar panel   3. Power Bank   4. Local Grid

A woman and a young child are seen from behind, looking out a large window at night. The woman is kneeling on the floor, and the child is standing next to her, both looking out at the dark landscape. The scene is dimly lit, with the primary light source being the window, which shows some greenery outside. The overall mood is contemplative and serene.

# SECURITY

POWER DESIGNED FOR YOUR SAFETY

Soluna Power Banks are designed provide you and your family peace of mind in the event of a power outage.

INTRODUCING  
**SOLUNA™**  
SOLAR POWER BANKS



## POWER BANK FEATURES

- Intelligent power management
- Simple user controls, power data history analysis, and programming
- Capacitive touch screen interface
- Secure battery access door
- Height-adjustable threaded appliance-grade feet for stability and level appearance





# Soluna Planta 2.5K PACK

## TECHNICAL SPECS



### POWER

Battery Type	Lithium Ion battery
Capacity	2.5 kWh
Depth of Discharge	90%
Voltage	51.2 V
Certification	Cell: UL1642 Module: UN38.3 and CE
Max Charge/Discharge	50 A
Operating Temperature	-10° to 50°C / 14°F to 122°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Floor Install in an indoor and/or covered outdoor area, or inside a power bank casing
Weight	24 kg / 52.8 lbs
Dimensions	(H x W x D) 550mm x 390mm x 110mm 21.7" x 15.4" x 14.3"

# BATTERY MODULE 4K PACK

## TECHNICAL SPECS



### POWER

Battery Type	Lithium Ion battery
Capacity	3.84 kWh
Depth of Discharge	80%
Voltage	51.2 VDC
Certification	Cell: UL1642 UN38.3, UL1973, and IEC62619
Max Discharge	50A
Operating Temperature	-10° to 45°C / 14°F to 113°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Floor Install in an indoor and/ or covered outdoor area, or inside a power bank casing
Weight	60 kg / 123.5 lbs
Dimensions	(H x W x D) 436mm x 678mm x 205mm 17.2" x 26.7" x 8.1"

# BATTERY MODULE EOS 5K

## TECHNICAL SPECS



### POWER

Battery Type	Lithium Ion battery
Capacity	5.12kWh
Depth of Discharge	90%
Voltage	51.2 V
Certification	Cell: UL1642 Module: UN38.3, UL1973, IEC62619 CE RoHS
Max Charge/Discharge	100A
Operating Temperature	-10° to 50°C / 14°F to 122°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Indoors
Weight	60 kg
Dimensions	(H x W x D) 595mm x 438mm x 165mm
Warranty	10-year standard warranty

# LIBERTY

## TECHNICAL SPECS



### POWER

Battery Type	Lithium Ion battery
Capacity	30.72 kWh
Depth of Discharge	90%
Voltage	51.2 V
Certification	Cell: UL1642 Module: UN38.3, UL1973, IEC62619 CE RoHS
Max Charge/Discharge	180A
Operating Temperature	-10° to 50°C / 14°F to 122°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Indoors
Weight	430 kg
Dimensions	(H x W x D) 1340mm x 600mm x 650mm
Warranty	10-year standard warranty

## BATTERY MODULE 6K PACK HV



### POWER

Battery Type	Lithium Ion battery
Capacity	6 kWh
Depth of Discharge	90%
Voltage	153.6 V
Certification	Cell: UL1642 Pack: UL9540A , UL1973 CE RoHS IEC62619 UN38.3
Max Charge/Discharge	40A / 40A
Operating Temperature	-10° to 50°C / 14°F to 122°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Indoors / Outdoors
Weight	74kg / 163 lbs
Dimensions	(H x W x D) 971mm x 654mm x 227mm 38.2" x 25.7" x 8.9"
Warranty	10-year standard warranty

# BATTERY MODULE 10K PACK HV

## TECHNICAL SPECS



### POWER

Battery Type	Lithium Ion battery
Capacity	10 kWh
Depth of Discharge	90%
Voltage	268.8 V
Certification	Cell: UL1642 Pack: UL9540A, UL1973 CE RoHS IEC62619 UN38.3
Max Charge/Discharge	40 A / 40A
Operating Temperature	-10° to 50°C / 14°F to 122°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Indoors / Outdoors
Weight	103 kg / 227 lbs
Dimensions	(H x W x D) 971mm x 654mm x 227mm 38.2" x 25.7" x 8.9"
Warranty	10-year standard warranty

# BATTERY MODULE 15K PACK HV

## TECHNICAL SPECS



### POWER

Battery Type	Lithium Ion battery
Capacity	15 kWh
Depth of Discharge	90%
Voltage	384 V
Certification	Cell: UL1642 Pack: UL9540A, UL1973 CE RoHS IEC62619 UN38.3
Max Charge/Discharge	40A / 40A
Operating Temperature	-10° to 50°C / 14°F to 122°F
Storage Temperature	-30° to 60°C / -22°F to 140°F
Humidity Conditions	5% to 95%

---

### MISCELLANEOUS

Installation	Indoors / Outdoors
Weight	146.8kg / 324lbs
Dimensions	(H x W x D) 1205mm x 654mm x 227mm 47.2" x 23.6" x 7.9"
Warranty	10-year standard warranty

# POWER BANK S4 PLUS

## TECHNICAL SPECS



### POWER

AC Power	3600 W
AC Voltage	230 VAC 50/60 Hz
PV MPPT Voltage	125-425 VDC
Battery Type	Lithium Ion battery
Capacity	5.12 kWh
Battery Voltage	51.2 VDC
Max Charge/Discharge	50 A
DOD	90%
Battery Modules	1
HDMI Interface	7" LCD
Operating Temperature	-10° to 45°C / 14°F to 113°F
Certification	Cell: UL1642 Pack: UN38.3, UL1973, and IEC62619 System: UL9540, IEC/EN 62109

### MISCELLANEOUS

Installation	Floor Install in indoor and covered outdoor area, or inside a power bank casing
Weight	138 kg / 303.6 lbs
Dimensions	(H x W x D) 1230mm x 700mm x 340mm 48.4" x 27.6" x 13.4"
Warranty	5-year standard warranty Optional 5-year extension



# POWER BANK S8 PLUS

## TECHNICAL SPECS



### POWER

AC Power	5000 W / 6000 W / 8000 W
AC Voltage	230VAC 50/60Hz / 120VAC & 240VAC
PV MPPT Voltage	125-425 VDC
Battery Type	Lithium Ion battery
Capacity	10.24 kWh
Battery Voltage	51.2 VDC
Max Charge/Discharge	100 A
DOD	90%
Battery Modules	2
HDMI Interface	7" LCD
Operating Temperature	-10° to 45°C / 14°F to 113°F
Certification	Cell: UL1642 Pack: UN38.3, UL1973, and IEC62619 System: UL9540, IEC/EN 62109

### MISCELLANEOUS

Installation	Floor Install in indoor and/or covered outdoor area,
Weight	240 kg / 528 lbs
Dimensions	(H x W x D) 1330mm x 750mm x 565mm 52.4" x 29.5" x 22.2"
Warranty	5-year standard warranty Optional 5-year extension

# POWER BANK S12 PLUS

## TECHNICAL SPECS



### POWER

AC Power	5000 W / 6000 W / 8000 W
AC Voltage	230VAC 50/60Hz / 120VAC & 240VAC
PV MPPT Voltage	125-425 VDC
Battery Type	Lithium Ion battery
Capacity	15.36 kWh
Battery Voltage	51.2 VDC
Max Charge/Discharge	100 A
DOD	90%
Battery Modules	3
HDMI Interface	7" LCD
Operating Temperature	-10° to 45°C / 14°F to 113°F
Certification	Cell: UL1642 Pack: UN38.3, UL1973, and IEC62619 System: UL9540, IEC/EN 62109

### MISCELLANEOUS

Installation	Floor Install in indoor and/or covered outdoor area.
Weight	300 kg / 660 lbs
Dimensions	(H x W x D) 1330mm x 750mm x 565mm 52.4" x 29.5" x 22.2"
Warranty	5-year standard warranty Optional 5-year extension

# POWER CELL

## TECHNICAL SPECS



### POWER

AC Power	30 kW / 50 kW / 100 kW
AC Voltage	400VAC / 415VAC / 480VAC
PV MPPT Voltage	520-800 VDC
Battery Type	Lithium Ion battery
Capacity	50 kWh / 100 kWh
Battery Voltage	250-850 VDC
Max Charge/Discharge	100 A
DOD	80%
Power Cell Connection	1-5pcs
HDMI Interface	LCD
Operating Temperature	-10° to 50°C / 14°F to 122°F
Certification	Cell: UL1642 Module: UN38.3, UL1973, and IEC62619 Inverter: UL1741, UL9540, CE LVD, CE EMC, IEC 61000


### MISCELLANEOUS

Installation	Indoors / Outdoors
Weight	TBD
Dimensions	TBD

Warranty	5-year standard warranty Optional 5-year extension
----------	---

# VOLANS PORTABLE POWER STATION

## TECHNICAL SPECS

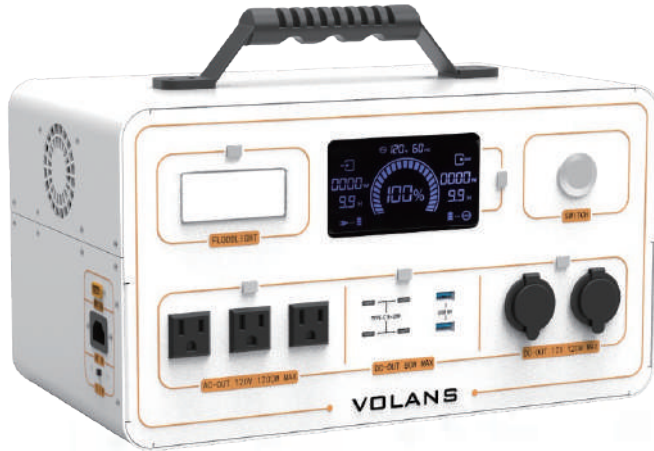

## POWER

Battery Type	Lithium Ion battery
Capacity	1.28 kWh
AC Power	1200W
Depth of Discharge	80%
Input Voltage	110V AC / 230V AC
Operation Tem	-10°C to 40°C / 14°F to 104°F
Relative humidity(%RH)	5%-95%
DC Output	Car charger output*2: 12V / 10A USB*2: 5V / 2.1A Type-C*4: 5VDC, 9VDC, 15VDC, 20VDC Max Output current 3A Max Output power 60W

## MISCELLANEOUS

Weight	16 kg
Dimensions	(H x W x D) 380mm x 215mm x 210mm 14.9" x 8.46" x 8.26"



# INDEPENDENCE

POWER DESIGNED TO SET YOU FREE

# PERFECT DESIGN

DAY AND NIGHT POWER CONSUMPTION



## HOME STORAGE SYSTEM SPECIFICATION

PV Input	S4	S8	S12
Max. recommended DC power (W)	3960	6500	6500
Max. DC voltage (V)	500	500	500
Norminal DC operating voltage (V)	360	360	360
MPPT voltage range (V)	125-425	125-425	125-425
Max. input current (A)	11	11	11
Max. short current (A)	16	16	16
Number of MPPT trackers	1	2	2
Strings per MPPT tracker	1	1	1
AC Output			
AC nominal power (W)	3600	5000	5000
Max. AC current (A)	18	25	25
Max. AC short current (A)	20	30	30
Max. AC protection current (A)	20	30	30
Nominal AC voltage/Range (VAC)	230 ;180-270	230 ;180-270	230 ;180-270
Grid Frequency/Range (Hz)	50(45-54) / 60(55-65)	50(45-54) / 60(55-65)	50(45-54) / 60(55-65)
Power factor (rated power)	≥0.99	≥0.99	≥0.99
Displacement Power Factor	±0.95	±0.95	±0.95
Grid type	Single phase(L/N/PE)	Single phase(L/N/PE)	Single phase(L/N/PE)
Total harmonic distortion (THD)	<3%	<3%	<3%
Off-Grid AC Output			
Max. AC power (W)	3600	5000	5000
Off-Grid AC Rated voltage (V)	220/230/240	220/230/240	220/230/240
AC nominal current (A)	13	20	20
Frequency (Hz)	50 / 60	50 / 60	50 / 60
Max. AC short current (A)	20	30	30
Switching time (ms)	20	20	20
Total harmonic distortion (THD)	<3%	<3%	<3%
Peak power(off grid)/Time	150%/10s	150%/10s	150%/10s
Back current (A)	0	0	0
Grid type	Single phase(L/N/PE)	Single phase(L/N/PE)	Single phase(L/N/PE)

## HOME STORAGE SYSTEM SPECIFICATION

Battery Data	S4	S8	S12
Battery type	Lithium Ion battery	Lithium Ion battery	Lithium Ion battery
Nominal Storage capacity (kWh)	5.12	10.24	15.36
Usable Storage Capacity (kWh)	4.6	9.21	13.82
Battery capacity (Ah)	100	200	300
Normal voltage (V)	51.2	51.2	51.2
Voltage range (V)	42-58	42-58	42-58
Max. charge current (A)	50 A	100 A	100 A
Max. discharge current (A)	50 A	100 A	100 A
DOD	90%	90%	90%
Cycle life	6000	6000	6000
Regular Parameters			
Dimension (H x W x D)	1230mm x 700mm x 340mm	1330mm x 750mm x 565mm	1330mm x 750mm x 565mm
Weight (kg)	138kg	240kg	300kg
Display	7" graphic LCD	7" graphic LCD	7" graphic LCD
Communication	CAN,WIFI	WIFI,CAN	WIFI,CAN
Operating temperature range (°C)	-10~+45	-10~+45	-10~+45
Storage stability range (°C)	-20~+60	-20~+60	-20~+60
Relative humidity	0-95%	0-95%	0-95%
Altitude (m)	<2000	<2000	<2000
Cooling methods	Forced airflow	Forced airflow	Forced airflow
Degree of protection	IP20	IP20	IP20
Certificates	IEC/EN 62109	IEC/EN 62109	IEC/EN 62109
Warranty	5 Year, Optional 5 year extension		



## HOME STORAGE SYSTEM SPECIFICATION (N/A)

PV Input	S8	S12	S12
Rated DC power(W)	7800	7800	10400
Max. DC Voltage(V)	500	500	500
MPPT Voltage range(V)	150~450	150~450	150~450
Starting Voltage(V)	200	200	200
Max. DC current(A)	10+10	10+10	18+18
Input String Number	2	2	4
Number of MPPT tracker	2	2	2
Strings per MPPT tracker	1	1	1
AC Output			
Rated AC output and UPS power (W)	6000	6000	8000
Max. AC power (W)	6000	6000	8000
Peak power (off grid)	1.5 times rated power, 10S	1.5 times rated power, 10S	1.5 times rated power, 10S
Continuous output current (A)	25	25	32
Over current protection (A)	50	50	55
Output frequency and voltage	50/60Hz; 120vac & 240Vac	50/60Hz; 120vac & 240Vac	50/60Hz; 120vac & 240Vac
Off grid output range	45~55Hz / 55~65Hz; 180~270Vac, 230Vac ± 2%	45~55Hz / 55~65Hz; 180~270Vac, 230Vac ± 2%	45~55Hz / 55~65Hz; 180~270Vac, 230Vac ± 2%
Current harmonic distortion	50Hz ± 0.2%, THD <3% (Linear loading) <1.5%	50Hz ± 0.2%, THD <3% (Linear loading) <1.5%	50Hz ± 0.2%, THD <3% (Linear loading) <1.5%
Power factor	0.9 Leading ~ 0.9 Lagging	0.9 Leading ~ 0.9 Lagging	0.9 Leading ~ 0.9 Lagging
Grid type	Single phase, Split phase	Single phase, Split phase	Single phase, Split phase

## HOME STORAGE SYSTEM SPECIFICATION (N/A)

Battery Terminal	S8	S12	S12
Battery type	Lithium Ion battery	Lithium Ion battery	Lithium Ion battery
Nominal Storage capacity (kWh)	10.24	15.36	15.36
Usable Storage Capacity (kWh)	9.21	13.82	13.82
Battery capacity (Ah)	200	300	300
Battery rated voltage (V)	51.2V	51.2V	51.2V
Voltage range (V)	42-58V	42-58V	42-58V
Max. charge current (A)	120	120	150
Max. discharge current (A)	120	120	150
DOD	90%	90%	90%
Cycle life	6000	6000	6000
Regular Parameters			
Dimension (H x W x D)	1330mm x 750mm x 565mm	1330mm x 750mm x 565mm	1330mm x 750mm x 565mm
Weight (kg)	240Kg	300Kg	300Kg
Display	7" graphic LCD	7" graphic LCD	7" graphic LCD
Communication	CAN ,WIFI	CAN ,WIFI	CAN ,WIFI
Operating temperature range (°C)	-10~+45	-10~+45	-10~+45
Storage stability range (°C)	-20~+60	-20~+60	-20~+60
Relative humidity	0-95%	0-95%	0-95%
Altitude (m)	<2000	<2000	<2000
Cooling methods	Forced airflow	Forced airflow	Forced airflow
Degree of protection	IP20	IP20	IP20
Certificates	UL1973, UL9540	UL1973, UL9540	UL1973, UL9540
Warranty	5 Year, Optional 5 year extension		



SOLUNA™

[www.solunabattery.com](http://www.solunabattery.com)

HAVE QUESTIONS? GIVE US A CALL: +86-21-57475835  
OR E-MAIL: [sales@solunabattery.com](mailto:sales@solunabattery.com)

No. 3492 JINQIAN ROAD,  
SHANGHAI, CHINA 201406